



FLASH

access

Protective helmet for work at heights, working over free depth and rescue purposes. It is primarily intended for protection against falling objects and to protect against Electric Arc. Helmet has a solid chin strap that will withstand a load of at least 50 kg, which prevents the possibility of dropping the helmet in case of fall.

DESCRIPTION



W9603RX00 RED



W9603QX00 HIGH VISIBILITY YELLOW



High density and shock resistant ABS/PC shell.

Four durable head lamp holders.

Universal 30 mm slots for hearing protection.

Visor compatible.


Headband with UNI size 53-63 cm.

Extra durable size adjustment mechanism.


Quick fastening and opening buckle in compliance with EN 12492.

KEY FEATURES

The helmet construction without EPS which provides well fitting to any head and superb durability.




two side and two rear adjusting sleeves to regulate the length of the chin straps




side universal 30 mm slots for hearing protection: Peltor, Hellberg, 3M...




thin profile buckle fits well with all hearing protectors




fast, easy and effective size adjustment mechanism on the back of the helmet



four head lamp holders for any head lamp available on the market



reflective stickers included



Side impact force protection according to EN 12492

STANDARDS

Combine requirements EN 397 and EN 12492



CE 1015





min. 50 kg



440 V
a. c.



-30 °C



EN 397
EN 12492



455 g
16.05 oz



53-63cm



unique
number



FEATURES




« Producto Distribuido por Fagy Peru® »

www.fagy.com.pe - www.ventadeepps.com

MATERIALS



- A. shell
- B. headlamp holders
- C. headband
- D. size adjustment mechanism
- E. buckle
- F. chinstrap
- G. retention straps
- H. removable padding
- I. retention straps holders



COMPATIBILITY WITH SHIELDS

Singing Rock
COVER visorHellberg Safe 2 flex carrier
+
Steel or Nylon mesh visor
or
Polycarbonate electric visor


RELATED PRODUCTS

HELMET TYPE	COLORS	STANDARDS						
FLASH Industry		EN 397 CE 1015	min. 15 kg max. 25 kg	440 V a. c.	-30 °C	✓	✗	✓
FLASH Aero		CE	min. 50 kg	✗	-10 °C	✗	✓	✓

MAINTENANCE

Lifetime of this product depends on the frequency and the environment in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 10 years from the date of production.

However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.

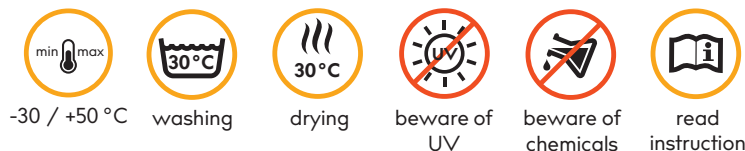

NOTES

