



D STEEL CONNECTOR

screw / triple lock

Extremely strong carabiner for work at heights. Thanks to its shape, it distributes the force efficiently to the main axis, which ensures its high resistance even under heavy loads. It is ideal for working at heights, creating anchor points or in industry.

DESCRIPTION

Long lifetime thanks to the zinc coating and durable steel construction.

Key-lock to prevent unwanted catching of the carabiner's hook, e.g. by loops.

Unique production number for easy record keeping at periodic inspections.

Equipped with a reliable key-lock with screw lock to prevent accidental opening



D shape optimises force distribution and increases stability under load.

High strength and large gate opening when the lock is open.

KEY FEATURES

- large opening (25 mm)
- excellent ergonomics
- high strength (30 kN)
- long lifetime

STANDARDS

CE 1019
EN 362

FEATURES



50 kN



13 kN



20 kN



25 mm



screw = 225 g
triple lock = 267 g



unique
number




warranty

MATERIALS



100 % steel

TECHNICAL DATA

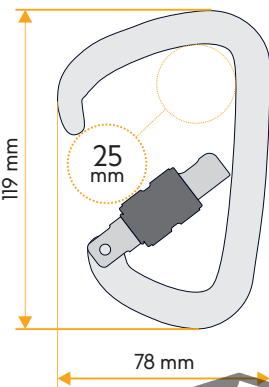

unique serial number
XXXX




production batch
MMYY (month, year)



Lifetime of this product is not strictly limited by the manufacturer. Depending on the condition of the product and its history it may be necessary to retire it immediately.



OTHER VIEWS



black colour applied using ED coating technology for longer black colour stability

RELATED PRODUCTS



OVAL STEEL CONNECTOR
screw
K4241ZO05



OVAL STEEL CONNECTOR
triple lock
K4241ZO07



HECTOR
screw
K0114EE00



HECTOR
triple lock
K0121EE00



OVAL STEEL CONNECTOR
screw / black
K4241ZB05



OVAL STEEL CONNECTOR
triple lock / black
K4241ZB07



HECTOR
screw / black
K0114BB00



HECTOR
triple lock / black
K0121BB00

GATE OPENING	18 mm	18 mm	26 mm	26 mm
WEIGHT	176 g / 6.21 oz	195 g / 6.88 oz	83 g / 2.9 oz	89 g / 3.1 oz

NOTES

