




PRUSIK SLING

Sewed accessory cord with a diameter 8 and 10 mm for wide use at tree care and rescue operations.

DESCRIPTION

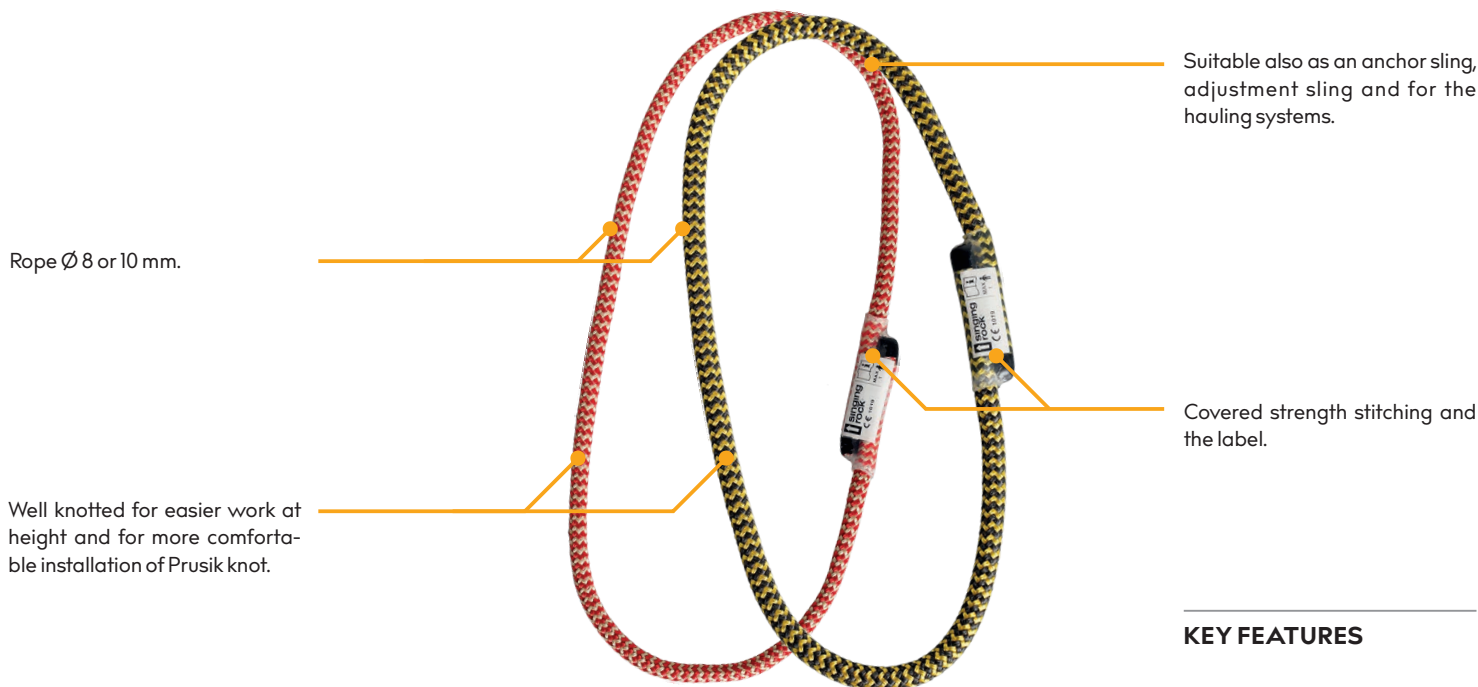

KEY FEATURES

- PES/TECHNORA material ensures better thermal and mechanical properties and longer sheath life

STANDARDS

CE 1019

EN 795B


FEATURES



1 person only



Ø 8 cm 18 kN
Ø 10 cm 18 kN



38 cm



Ø 8 cm 48 g
Ø 10 cm 70 g



warranty

MATERIALS




Ø 8 cm

84 % PES
16 % TECHNORA

Ø 10 cm

79 % PES
21 % TECHNORA

TECHNICAL DATA

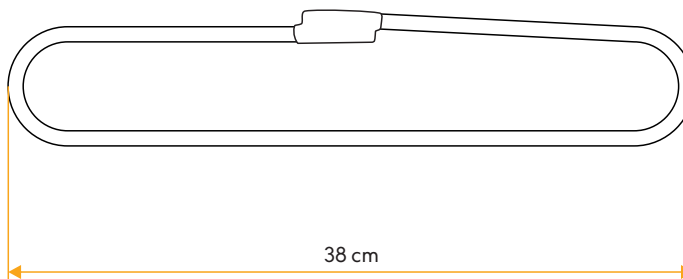

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use. However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.



beware of
salt



beware of
UV



beware of
chemicals



washing



drying



read
instructions

Three types of lifting slings are shown: a yellow and black braided sling, a red braided sling, and an orange braided sling. Each sling has a hook at one end and a loop at the other.

**TIMBER ACCESSORY
CORD**
W2608, W2610



PULLEY SLING
W2603YB00



RING SLING
W2604RR00



TREE ANCHOR
W2114

LENGTH	75–100 cm	40 cm	40 cm	500 cm
ROPE DIAMETER	8 mm / 10 mm	10 mm	10 mm	11 mm
WEIGHT	48–55 g	160 g	115 g	525 g

