


MSA V-SHOCK® PFL Product Specifications

Color Coding & Iconography

Make product selection quick and easy



Green Housing
(Leading Edge)



Gray Housing
(Non-Leading Edge)




Leading Edge Icon



Non-Leading Edge Icon

Clearance Charts

Designed for ease of understanding

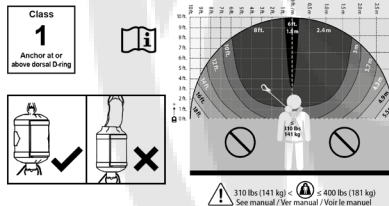

Dashboard Labels

Deliver critical information at a glance



V-SHOCK® PFL 6 ft / 1.8 m



ANSI: 310 lb / 141 kg
OSHA: 400 lb / 181 kg

© MSA Technology, LLC 2022



MSAsafety.com



V-SHOCK® EDGE PFL 6 ft / 1.8 m




ANSI: 310 lb / 141 kg
OSHA: 310 lb / 141 kg

© MSA Technology, LLC 2022



MSAsafety.com

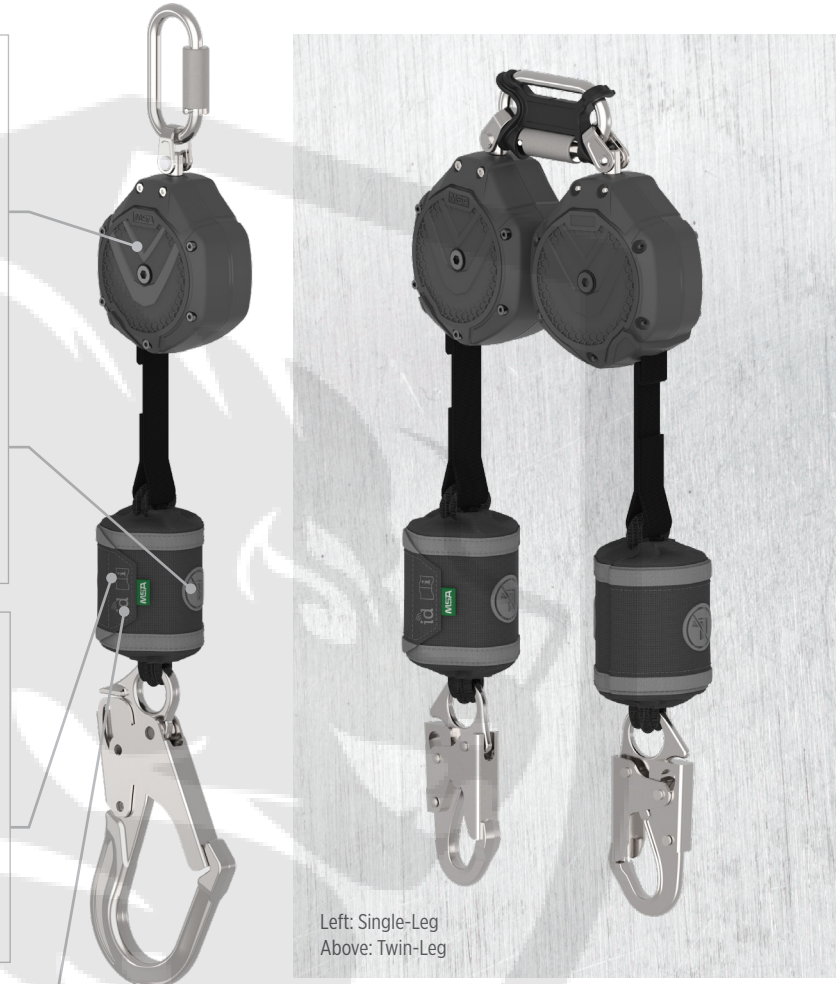

Left: Single-Leg
Above: Twin-Leg

Material Specifications

WEIGHT	See weight table
UNIT LENGTH	6 ft. (1.8 m) 10 ft. (3 m)
UNIT WIDTH	SINGLE-LEG TWIN-LEG
UNIT DEPTH	6 ft. (1.8 m) 10 ft. (3 m)
HOUSING MATERIAL	Nylon
HARDWARE MATERIALS	Steel or Aluminum
LIFELINE MATERIAL	NON-LEADING EDGE WEB PFL LEADING EDGE WEB PFL
ENERGY ABSORBING TECHNOLOGY	Tear Tape

V-SHOCK PFL Specifications & Ordering Information

6 ft. (1.8 m) Non-Leading Edge Web PFL				
Part Number	Type	Single/Twin	Snaphook	Item Weight
VSOHW-011-NB-A	V-SHOCK	Single	36C	3.66 lb. (1.66 kg)
VSOHW-011-NE-A	V-SHOCK	Single	36CS	3.91 lb. (1.77 kg)
VSOHW-011-NF-A	V-SHOCK	Single	36CL	4.64 lb. (2.10 kg)
VSOHW-011-NG-A	V-SHOCK	Single	AL36C	3.35 lb. (1.52 kg)
VSOHW-011-NA-A	V-SHOCK	Single	AL36CL	4.17 lb. (1.89 kg)
VSOHW-011-NH-A	V-SHOCK	Single	AL36CLS	4.35 lb. (1.97 kg)
VSOHW-011-NC-A	V-SHOCK	Single	ALTAKS	3.25 lb. (1.47 kg)
VSOHW-011-NJ-O-TB	V-SHOCK Tie-Back	Single	FP5K	3.60 lb. (1.63 kg)
VSOHW-012-QB-A	V-SHOCK	Twin	36C	7.31 lb. (3.32 kg)
VSOHW-012-QE-A	V-SHOCK	Twin	36CS	7.82 lb. (3.55 kg)
VSOHW-012-QF-A	V-SHOCK	Twin	36CL	9.28 lb. (4.21 kg)
VSOHW-012-QA-A	V-SHOCK	Twin	AL36CL	8.35 lb. (3.79 kg)
VSOHW-012-QH-A	V-SHOCK	Twin	AL36CLS	8.71 lb. (3.95 kg)
VSOHW-012-QC-A	V-SHOCK	Twin	ALTAKS	6.50 lb. (2.95 kg)
VSOHW-012-QJ-O-TB	V-SHOCK Tie-Back	Twin	FP5K	7.20 lb. (3.27 kg)

10 ft. (3 m) Non-Leading Edge Web PFL				
Part Number	Type	Single/Twin	Snaphook	Item Weight
VSOHW-031-NB-A	V-SHOCK	Single	36C	4.86 lb. (2.20 kg)
VSOHW-031-NE-A	V-SHOCK	Single	36CS	5.11 lb. (2.32 kg)
VSOHW-031-NF-A	V-SHOCK	Single	36CL	5.84 lb. (2.65 kg)
VSOHW-031-NG-A	V-SHOCK	Single	AL36C	4.55 lb. (2.06 kg)
VSOHW-031-NA-A	V-SHOCK	Single	AL36CL	5.37 lb. (2.44 kg)
VSOHW-031-NC-A	V-SHOCK	Single	ALTAKS	4.45 lb. (2.02 kg)
VSOHW-031-NJ-O-TB	V-SHOCK Tie-Back	Single	FP5K	4.80 lb. (2.18 kg)
VSOHW-032-QE-A	V-SHOCK	Twin	36CS	9.82 lb. (4.45 kg)
VSOHW-032-QF-A	V-SHOCK	Twin	36CL	11.28 lb. (5.12 kg)
VSOHW-032-QA-A	V-SHOCK	Twin	AL36CL	10.35 lb. (4.69 kg)
VSOHW-032-QH-A	V-SHOCK	Twin	AL36CLS	10.71 lb. (4.86 kg)
VSOHW-032-QJ-O-TB	V-SHOCK Tie-Back	Twin	FP5K	9.20 lb. (4.17 kg)

Snap Hooks & Top Connectors

Snaphooks		
		
36C	36CS	36CL
		
AL36C	AL36CL	AL36CLS
		
ALTAKS	FP5K	
Top Connectors		
		
Carabiner	Twin Link Clip	Locking Pin Connector

Material Specifications	
TOP CONNECTOR	
SINGLE	Galvanized Steel Triple Action Carabiner
TWIN	Twin Link Galvanized Steel Triple Action Carabiner

Performance Specifications	
STANDARDS & CAPACITY	
ANSI Z359.14	130-310 lb. (60-141 kg)
OSHA 1926.502	100-400 lb. (45-181 kg)
ARREST FORCES	
PEAK	1,029 lb. (470 kg)
AVERAGE	800 lb. (366 kg)

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice. MSA is a registered trademark of MSA Technology, LLC in the US, Europe, and other Countries. For all other trademarks visit <https://us.msasafety.com/Trademarks>.