

↑ OPEN SLING

25 mm


High-strength sewn sling for creating an anchor point for up to three people.

DESCRIPTION

Lengths are color-coded for easy differentiation.

Webbing used to produce the slings is color-split: one side is colored and the other side is black with five contrasting stripes symbolizing the minimum webbing strength of 25 kN.

Made of polyester, which is abrasion-resistant, has very good UV resistance and its low water absorption ensures faster drying and resistance to mold. Polyester also has excellent shape stability and does not change its length due to extreme humidity and temperature.

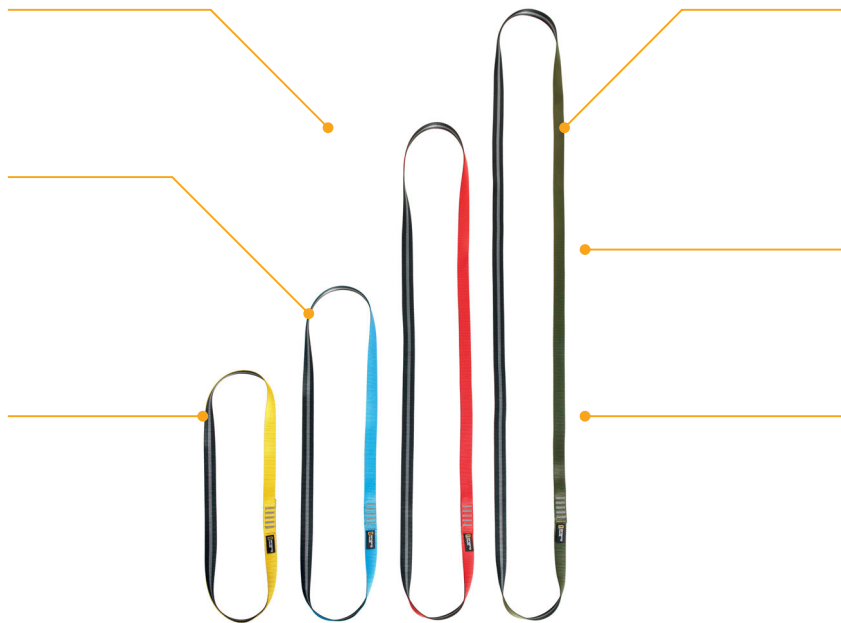

Designed for demanding outdoor use, whether for anchoring or as a connecting element during work at height.

Sling is tested for loads that may occur during the fall of multiple persons according to CEN/TS 16415.

All lengths are also available in black (anthracite stitching).

KEY FEATURES

- width 25 mm
- UV-resistant
- dimensionally stable

STANDARDS

CE 1019

EN 354
EN 795B
EN 566
CEN/TS 16415

FEATURES

-  33 kN
-  25 mm
-  60/80/
120/150 cm
-  max.
3 persons
-  75/97/
150/178 g
-  unique
number
-  3
YEARS
warranty

MATERIALS



● 99% PES
● 1% PAD

TECHNICAL DATA

CODE	COLOR	LENGTH	WEIGHT
W2008Y060	yellow/black	60 cm	75 g / 2.65 oz
W2008A080	blue/black	80 cm	97 g / 3.42 oz
W2008R120	red/black	120 cm	150 g / 5.29 oz
W2008K150	khaki/black	150 cm	178 g / 6.28 oz
W2008B060	black	60 cm	75 g / 2.65 oz
W2008B080	black	80 cm	97 g / 3.42 oz
W2008B120	black	120 cm	150 g / 5.29 oz
W2008B150	black	150 cm	178 g / 6.28 oz



MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use. However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.




OTHER VIEWS



Available also in black only (anthracite stitching).

RELATED PRODUCTS

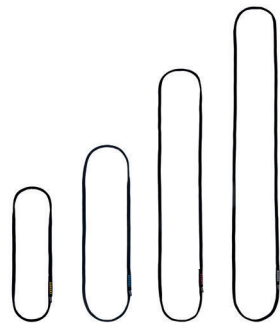

OPEN SLING 14 mm
W2005



SLING 16 mm
C2075



OPEN SLING 20 mm
W2001

STRENGTH	25 kN	22 kN	22 kN
WIDTH	14 mm	16 mm	20 mm
LENGTH	60; 80; 120; 150 cm 24; 32; 47; 60 in	60; 80; 120; 150; 240 cm 24; 32; 47; 60; 94 in	60; 80; 120; 150 cm 24; 32; 47; 60 in

NOTES

